


1

2

3

4

REV.	DESCRIPTION	DATE	APPROVED
1	Added note 5.	16/10/2018	Igor

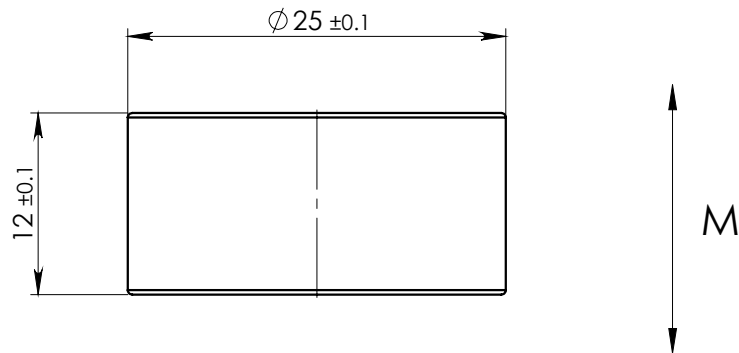

A

B

C

D


E

NOTE:

1. Material: Grade - N40.
2. Finish: Zn coated.
3. Remove sharp corners with R0.3 mm max.
4. Delivery magnetized.
5. Delivery with dividers between each magnet and between magnets rows.

MAGNETIC CHARACTERISTICS:			
		CGS	SI
Br	MIN	12.6 kG	1.26 T
	MAX	12.9 kG	1.29 T
bHc	MIN	11 kOe	876 kA/m
jHc	MIN	12 kOe	955 kA/m
BHmax	MIN	38.1 MGOe	303 kJ/m ³
	MAX	40 MGOe	318 kJ/m ³

Working Temperature. 80° max.

ASSEMBLY		NAME			SHEET 1		OF 1	
DWG.NO NDDR025012AMD		MAGNET NDDR025012A			NAME	DATE	SIGNATURE	
	General Shape-and Position tolerance according DIN ISO 2768-mK		MATERIAL	NdFeB	DESIGNED	Igor	02/09/2012	
			MASS	44.16(gr)	DRAWN	Igor	02/09/2012	
	Surface Finish $\sqrt{3.2}$		SCALE	2:1	APPROVED	Rashid	02/09/2012	

F